

STEEL PAINTED RACKS • ALUMINUM RACKS • POLY BOARD RACKS



STEEL PAINTED RACKS



ALUMINUM RACKS

MANUFACTURED BY TAFCO EQUIPMENT COMPANY • BLUE EARTH, MN



POLY BOARD RACKS




STANDARD HEAVY DUTY PLATFORM • STANDARD SPECIFICATIONS

- 6 1/4" Outer rub rail 10 ga.
- 10 ga. Crossmembers 16" spacing
- 5" Structural channel long sills
- Painted gloss black platform
- Floors available: T&G fir; 10 ga. smooth steel; 1/8" floor plate
- Light kit (11 lights)
- Platform dimensions: 102" or 96" width x 9', 9½', 10', 12', 14', 16', 18', 20', and 22' length


FLEET PLATFORM • STANDARD SPECIFICATIONS


- 41/8" Outer rub rail 12 ga.
- 12 ga. Crossmembers 24" spacing
- 4" Structural channel long sills
- Painted gloss black
- 2' x 6' T&G fir
- Light kit (7 lights)
- Platform dimensions: 66"x 7', 80"x 8', 88"x 8', 80"x 9', 88"x 9', 94" x 91/8', 94"x 10', and 94"x 12'

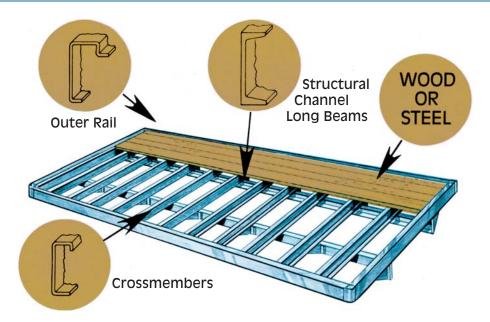

OPTIONS FOR HEAVY DUTY AND FLEET PLATFORM

- Larger long sills
- Extra crossmembers
- Steel, aluminum, or poly board rack (see specs.)
- solid bulkhead (see bulkhead specs.)
- Steel overlay for wood platform

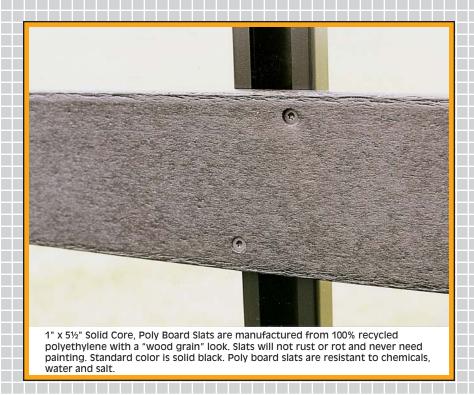





STAKE RACKS • STANDARD SPECIFICATIONS

- 30" Heights on 9' and shorter platforms
- 42" Heights on 9½' and longer platforms
- Steel, aluminum, or poly board
- Steel painted standard red or black

- Poly racks black wood grain
- Stake spacing 24" on center
- Tail gate sections are removable
- Rack tie down and connecting hardware zinc coated



42" bulkheads with mesh windows are optional for both Fleet and Standard platforms. Fleet uses stake pockets; Standard welds to platform frame.




BULKHEAD • STANDARD SPECIFICATIONS - LIGHT DUTY

- 12 ga. Steel
- . Mounts in platform stake pockets
- 42" Height96", 94", or 88" Widths
- Full mesh windows
- Painted gloss black

BULKHEAD • STANDARD SPECIFICATIONS - HEAVY DUTY

- 10 ga. Steel
- 4 ea. 3" Channel supports (center two extended to weld to platform long sills)
- 42", 50", or 60" Heights102", 96", or 88" Widths
- Painted gloss black



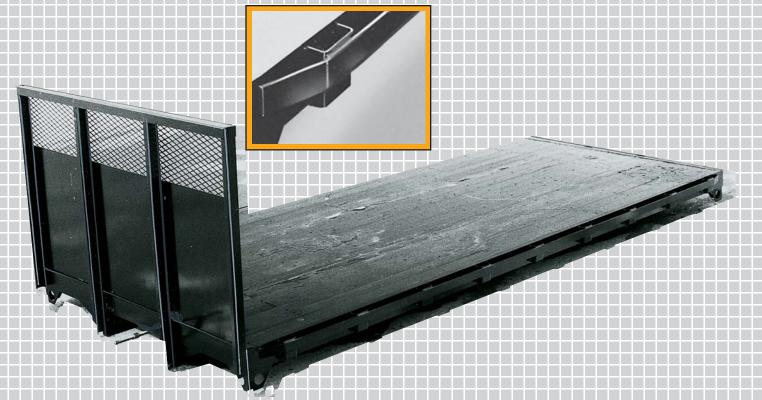

- •Long sills: 12'6"- 6" channel; 14'6", 16'6", and 18'6"- 7" channel; 20'6", 22'6", and 24'6"- 8" channel
- •Crossmembers: 4" structural channel on 12" centers; gussets (Fore/Aft) on every crossmember
- •Outer rail: 6" structural channel
- •Stake pockets: on 24" centers •Outside banding rails: on sides and rear of platform, 3/6" x 21/2"
- •Bulkheads: four 3" structural stakes; 10 ga. panels; 161/2" x 92" expanded steel window, 42", 50", and 60" heights
- •Lighting: eight drop corner lights, rubber mounted sealed beam; three light cluster bracket at rear
- •Color: black

PLATFORM AND BULKHEAD WEIGHTS (Approx.)					
Outside Platform Dimensions	Inside Platform Dimensions	Wood Floor Platform	10 ga. Smooth Steel Over Wood Platform	1/8" Treadplate Steel Over Wood Platform	42" Bulkhead with Window
12'6" x 102"	12' x 97½"	1560 lbs.	2122 lbs.	2060 lbs.	285 lbs.
14'6" x 102"	14' x 97½"	1800 lbs.	2450 lbs.	2380 lbs.	285 lbs.
16'6" x 102"	16' x 97½"	2040 lbs.	2620 lbs.	2580 lbs.	285 lbs.
18'6" x 102"	18' x 97½"	2280 lbs.	2910 lbs.	2860 lbs.	285 lbs.
20'6" x 102"	20' x 97½"	2520 lbs.	3260 lbs.	3210 lbs.	285 lbs.
22'6" x 102"	22' x 97½"	2780 lbs.	3555 lbs.	3490 lbs.	285 lbs.
24'6" x 102"	24' x 97½"	3005 lbs.	4100 lbs.	3985 lbs.	285 lbs.



AVAILABLE FROM: