

# Sto Value By THIEMAN

Raising Performance to New Levels

# **Model LRST-40**

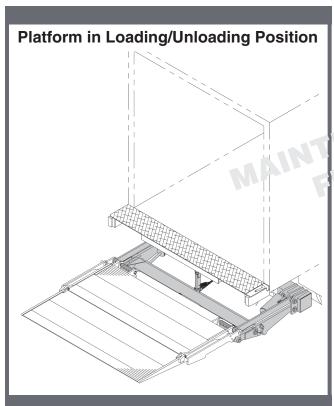

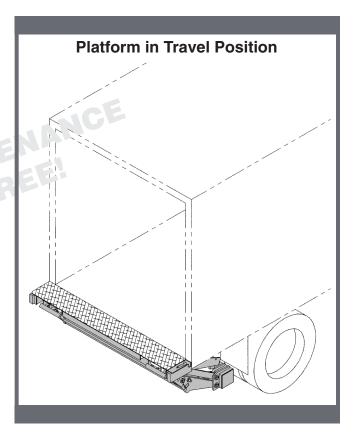

### **FEATURING:**

- Self-Leveling Action
- Large 80" x 60" Platform
- Heavy Duty Lift Frame
- 4000 Lb. Lift Capacity
- Dual Cylinder Lift
- Maintenance-Free Bushings
- Pump Enclosure for Protection from Weather
- Meets TMC Electrical Guidelines




The LRST (Level Ride Stowaway) is designed for handling loads of up to 4,000 lbs. and features a self-leveling action and an adjustable platform to provide a stable, "level with truck" surface for all types of loading conditions.

With maintenance being a major concern among fleets today, Thieman has incorporated self-lubricating Teflon bearings at all of the LRST pivot points. The LRST has a unique design so the cylinder rods are retracted during transit to protect them from road debris. The LRST also includes a standard plastic pump enclosure for protection from the weather. All of these features reduce the need for maintenance and keep your trucks and trailers on the road.

Along with a large 80" x 60" aluminum platform and self-lubricating bearings, is the industry's strongest lift frame. This makes the THIEMAN LRST the most efficient, reliable and durable Level Ride Stowaway in its class.

# **Features, Benefits and Specifications**

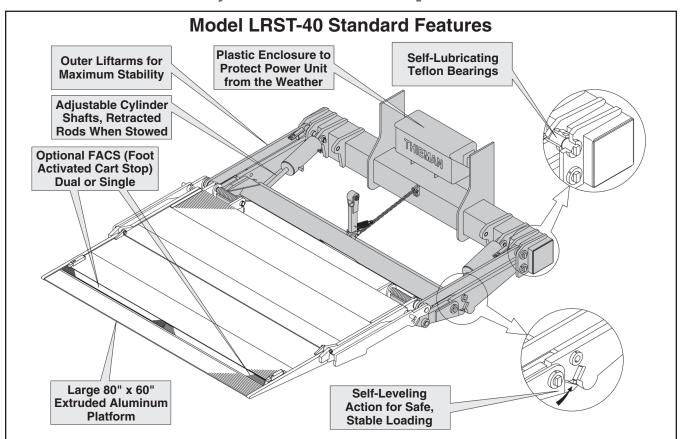

## STANDARD FEATURES AND BENEFITS:

- Self-Leveling Action to Provide Stable, "Level with Truck" Surface for All Types of Loads.
- Teflon Composite Bearings Used with Stress-Proof Pins for Virtually Maintenance-Free Operation at Pivot Points.
- No Lubrication Required at Pivot Points for Less Overall Maintenance.
- Dual Lift Cylinders for Maximum Stability.
- Adjustable Cylinder Shafts for Adjusting Platform Height.
- Adjustment Bolts for Adjusting Platform Angle.
- Meets All TMC Electrical Guidelines for Reduced Service Requirements.
- Power Up and Power Down for Better Cold Weather Operations.
- Plastic Pump Enclosure for Protection from Weather.
- Sealed Toggle Switch Control for Easy Weather Proof Operation.
- Dual Travel Latches to Secure Lift During Road Travel.
- 150 Amp Circuit Breaker for Electrical Protection.
- Snubber Kit for Reduced Movement While in Travel Position.

### **AVAILABLE OPTIONS FOR LRST-40:**

- Remote Pendant Control
- In-Cab Shut Off Switch
- Heavy Duty I-Beam Dock Bumpers
- Rear Impact Guard (FMVSS 223)
- Light Kits
- Foot Activated Cart Stops
- Trailer Kits
- PTO Power Source
- Galvanized Undercarriage

Model #	Platform	Ramp	Load Capacity	Lowering	Approx. Install Wt.	Bed Height Range
LRST 40 EST LRST 40 ESPB	80" X 60" 80" X 60"	Full Taper Full Taper	4000 Lbs. 4000 Lbs.	Power Power	1450 1450	46" to 56" 46" to 56"
Application: Van Bodies, Trailers and Stake Bodies						
EST-Electric w/To	oggle Switch Cont	rol/Power Down	ESPB - Electric w/Push Button Control/Power Down			

Distributed By:



Raising Performance to New Levels

600 East Wayne Street Celina, Ohio 45822 Phone: 419-586-7727 or 800-524-5210

Fax: 419-586-9724

www.thiemantailgates.com info@thiemantailgates.com

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice. Printed in U.S.A. Rev. 5/10 • 2M • MP70077