

# S3010E

## SELF PROPELLED MINI SCISSOR LIFT



- Compact & lightweight electric mini scissor lift
- Can be driven at full height
- Zero inside turning radius
- Drives through a standard doorway
- Ideal for low-level interior installation and maintenance applications

**snorkel**  
[www.snorkellifts.com](http://www.snorkellifts.com)

# SELF PROPELLED MINI SCISSOR LIFT


# S3010E

DIMENSIONS	S3010E
Max. working height	5.0m
Max. platform height (A)	3.0m
Platform size	1.09m x 0.51m
Overall width (B)	0.77m
Overall length (C)	1.26m
Stowed height (D)	1.8m
Ground clearance	58mm

PERFORMANCE	
Platform capacity (SWL)	227kg
Max. drive height	3.0m
Max. wind speed	0m/s
Max. drive speed (stowed)	3.5km/h
Max. drive speed (elevated)	0.65km/h
Raise/lower time	18/25 sec
Gradeability	25%
Max. operating slope	2°
Inside turning radius	0m
Outside turning radius	1.4m
Tires	230mm non-marking rubber
Parking brake	2 wheel automatic
Drive system	DC direct drive
Controls	2 axis proportional joystick

POWER	
Power source	2 x 12V 105Ah
Battery charger	100-240V 50/60Hz Auto, 30Amp

WEIGHT	
Weight	495kg

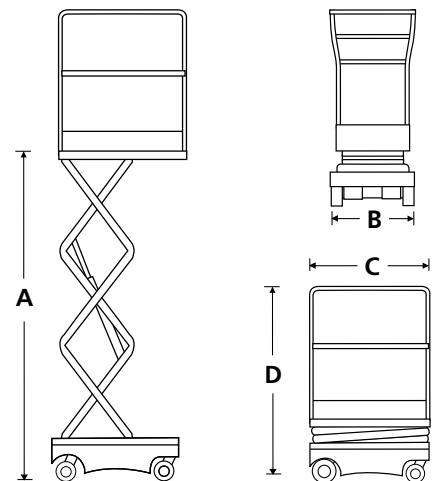


## STANDARD FEATURES

- Highly maneuverable skid steer
- Zero inside turning radius
- Proportional point & go joystick controls
- Saloon-door style entry gates
- Tilt + descent alarm
- Non-marking rubber tires
- Crane points & through-the-chassis fork pockets
- Integrated battery charger
- Horn
- 1 person indoors
- Selectable motion alarm
- Battery condition indicator
- 2 year parts & labor, 5 year structural warranty
- Hour meter
- ANSI compliant

## OPTIONS

- Special paint colors
- Environmental hydraulic oil
- CSA compliant

## TURNING RADIUS

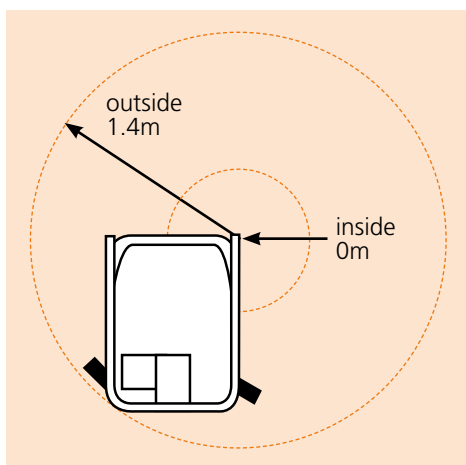

**snorkel** [www.snorkellifts.com](http://www.snorkellifts.com)

P.O. Box 1160  
St. Joseph, MO 64502-1160, USA  
Tel: 1 (785) 989-3000  
Toll-free: 1 (800) 255-0317  
Fax: 1 (785) 989-3070  
Email: [sales.usa@snorkellifts.com](mailto:sales.usa@snorkellifts.com)