# **SR630**

### **ROUGH TERRAIN TELEHANDLER**



- Full-time 4 wheel drive
- Fully enclosed cab
- Power assisted steering
- Proportional joystick
- Simple to operate & maintain



### **ROUGH TERRAIN TELEHANDLER**

## **SR630**

CAPABILITIES	SR630
Max. lift capacity	2,721kg
Max. lift height ( <b>A</b> )	9.19m
Max. forward reach	5.61m


DIMENSIONS	
Overall Width ( <b>B</b> )	1.9m
Stowed height ( <b>C</b> )	2.1m
Length to fork face ( <b>D</b> )*	4.9m
Wheelbase	2.9m
Ground clearance	355mm


PERFORMANCE	
Max. drive speed	24.1km/h
Raise/lower time	10/10sec
Frame leveling	6°
Hydraulic flow (per minute)	98.4L
Hydraulic pressure	241.3bar
Hydraulic oil capacity	189.2L
Fuel capacity	98.4L
Outside turning radius	3.3m
Tires	12.5/80-18 Pneumatic

POWER	
Power source	Deutz TLD 2.9L 74 hp Tier 4 Final

WEIGHT	
Weight	6,214kg

#### LOAD CHART

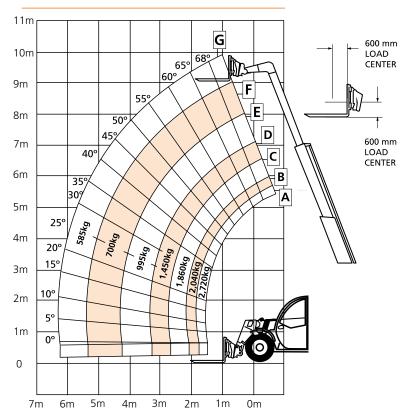



#### STANDARD FEATURES

- 360° operator visibility
- Large cross section boom with wear pads
- Steel hydraulic & fuel tanks
- Plastic dash with display screen
- Easy service access
- Hydrostatic 2 speed transmission
- Front and rear limited slip axles
- Plastic fenders
- Easy cab mounted grab handles
- Solid steel plate chassis
- Melonite pins
- Machine lift points
- 1.21m fixed carriage
- 1.21m pallet forks
- LED boom work lights
- 2 year parts & labor, 5 year structural warranty
- ANSI compliant

#### **OPTIONS**

- Special paint colors
- Multiple options for carriages, tires and fork tines
- Flashing amber lights
- Swivel hook
- Backup cameras
- Universal skid steer attachment
- CSA compliant

## **S**snorkel

P.O. Box 1160 St.Joseph, MO 64502-1160, USA

Tel: 1 (785) 989-3000

Toll-free: 1 (800) 255-0317 Fax: 1 (785) 989-3070

Email: sales.usa@snorkellifts.com