

EnForcer®

SCR PLUG-IN™

Single Shift Charger

- For every pallet truck
- For light duty narrow-aisle trucks
- For small, sit-down rider trucks
- Available in 12, 24, 36 and 48 volt sizes

Sealed Battery Charger

- For virtually all sealed AGV batteries
- For pallet trucks with sealed batteries
- Available in 12, 24, 36 and 48 volt sizes



Compare these benefits to your present charger:

- Maximizes battery life
- Minimizes battery watering
- Recharges a wide range of batteries
- Starts/Stops automatically
- Reduces human error
- Plugs into any 120 VAC 60Hz outlet
- Eliminates installations costs
- Portable and rugged

ELECTRONIC CONTROL TERMINATES CHARGE SAFELY, AUTOMATICALLY

The SSC and SBC's solid-state electronic control module monitors and controls charge throughout entire process. Eliminates human error by terminating automatically when full charge is attained. Red "charge complete" indicator signals completion. Added safeguards: Should control module ever fail, electronic solid-state time automatically terminates charge after 16 hours total charge time.

AUTOMATIC START/STOP

Charging begins automatically upon proper connection. Charging stops without need to turn dials or switches. Should battery be improperly connected (reverse polarity), control circuit will prevent charger from turning on.

FOR EXTREMELY COLD OR OVER-DISCHARGED BATTERIES

Should charger not start automatically because of extremely cold or over-discharged battery, a pushbutton "start" switch on the front panel lets you start the charger manually.

MANUAL STOP AND RESTART SWITCH

To interrupt charging process, for whatever reason, simply push "stop" button. (Push again to restart.)

SPECIFICATIONS

No. of Cells in Series	Model Number	60 Hertz AC Supply	Recharge Maximum Range in 16 Hrs.	Catalog Number	AC AMP	Est. Ship Weight
6	SSC-6-550	120	550	SSC-6-550Z	9.7	65
12	SSC-12-200	120	200	SSC-12-200Z	9.5	33
12	SSC-12-550	120	550	SSC-12-550Z	14.7	73
18	SSC-18-500	120	500	SSC-18-500Z	15.5	70
24	SSC-24-400	120	400	SSC-24-400Z	15.5	78
6	SBC-6-45	120	550	SBC-6-45Z	9.7	65
12	SBC-12-40	120	550	SBC-12-40Z	14.7	73
18	SBC-18-30	120	500	SBC-18-30Z	15.5	70
24	SBC-24-22	120	400	SBC-24-22Z	15.5	78

ELIMINATES HUMAN ERROR

Automatic charging ensures precise charging regardless of battery depth of discharge. Eliminates need for manual timing or rate control.

CURRENT CONTROLLED; PROPER RATE MAINTAINED

SCR's monitor controls charge rate throughout. Maintains proper rates even if battery is overdischarged or if AC supply voltage changes.

STANDARD EQUIPMENT



DC cord with 10 ft. of heavy-duty 2-conductor cable and Anderson SB6325-61 connector. AC cord with 8 ft. of 3-conductor cable and grounded 3 prong 120 VAC plug. Easy-to-read DC ammeter.

OPTIONAL EQUIPMENT

Export packing; special leads and charging harness; wall hanging brackets; special charger connectors available.

CABINET DIMENSIONS

For All SSC and SBC Chargers
HEIGHT = 18.5" WIDTH = 16" DIAMETER = 8.5"

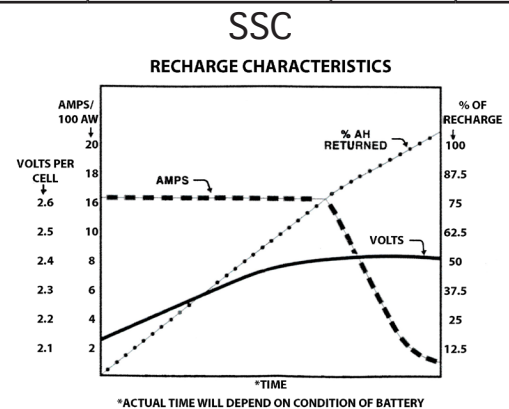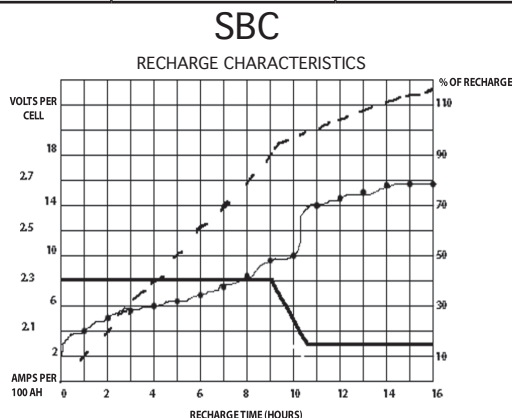

2366 Bernville Rd, Reading, PA 19605 - 1-800-EnerSys - www.enersys.com