

# The General™ Battery

## When Only A Quality Flooded Battery Will Do.

Our General™ batteries are designed around your individual applications, to meet your specific demands and deliver the ultimate in value. Each General battery is built in our own ISO 9001 certified plants. We were the first in our industry to achieve this certification, and we continue to improve our processes in order to assure you of exceptional quality and superior performance.

General batteries supply a battery lifetime of dependable power. We promote the highest quality standards to provide you with the best product, at the best value.


Each General battery has numerous built-in features to ensure outstanding performance.



Reliable Power for Lift Truck and Pallet Jack Performance.



# The General™ Battery

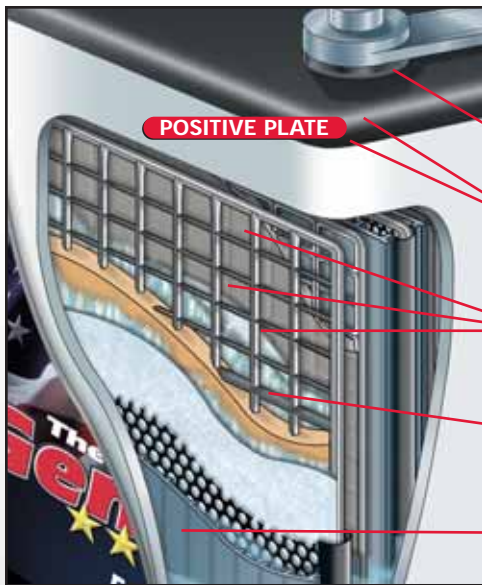

## Quality Flooded Batteries Are Built From Within.

- **Design:** Lead insert bushings.  
**Advantage:** Prevents electrolyte creepage.
- **Design:** Injection-molded, polypropylene jars with heat sealed jar-to-cover seals.  
**Advantage:** Prevents corrosion and guards against leaking. In fact, the jar-to-cover heat seal is guaranteed against leakage for life.
- **Design:** A computer designed power grid system.  
**Advantage:** Locking active material in place for lower internal resistance and a longer battery life.
- **Design:** Retent-a-tape® positive plate.  
**Advantage:** Bonds fine glass particles to the glass mat. When placed vertically against positive plate surface, it prevents shedding of active material.
- **Design:** A sleeved positive plate separator.  
**Advantage:** Reduces shorts and potential problems with misalignment.

## Plug-and-Go General™ Power Paks for a Convenient Charge Anywhere.

The General™ Power Pak combines our 12V or 24V battery with a self-contained, plug-in charger. Each General Power Pak features all the long-life components of its larger companions. So you get economical, dependable performance for all jobs – from pallet jacks to stand-up riders, tuggers and order-pickers.

The built-in charger uses Silicon Controlled Rectifier (SCR) technology and dv/dt termination. The result: fully automatic, fool-proof charging, anywhere you need it. Just plug it in, and you're set to go.



General™ Battery — AH Data			
Type	AH/Pos	Height**	Plates
55GL	55	14.87"	5-33
75GL	75	18.94"	5-33
75G	75	22.75"	5-33
85G	85	22.75"	5-33
100G	100	25.56"	5-33
125G	125	30.56"	5-33

\*\*standard coverless battery height over lifting ear

GB™ Powerpaks — AH Data			
Type	AH/Pos	Height	Plates
75G	75	23.30"	5-11
85G	85	23.86"	5-11
100G	100	26.30"	5-11

**Call 1-800-EnerSys to reach your local EnerSys® General Battery™ Representative.**

IND-100 12/08 ©2008 EnerSys. All rights reserved. Trademarks and logos are the property of EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&EO.



**ENERSYS WORLD HEADQUARTERS**  
2366 Bernville Road  
P.O. Box 14145  
Reading, PA 19612-4145  
Phone: 1-800-EnerSys  
Fax: 610-372-8613  
www.enersysmp.com

**ENERSYS CANADA INC.**  
61 Parr Boulevard Unit 3  
Bolton, Ontario • Canada L7E 4E3  
Phone: 800-363-4877  
Fax: 905-951-4441

**ENERSYS DE MEXICO SA DE CV**  
Ave Lopez Mateos #4210  
Colonia Casa Blanca • C.P. 66475  
San Nicolas de los Garza, N.L. Mexico  
Phone: 011-52-818-329-6400  
Fax: 011-52-818-329-6489